




## Distributed Three Port Waveguide Circulator

Model 102483-2.85

Patent No 6,407,646,B1

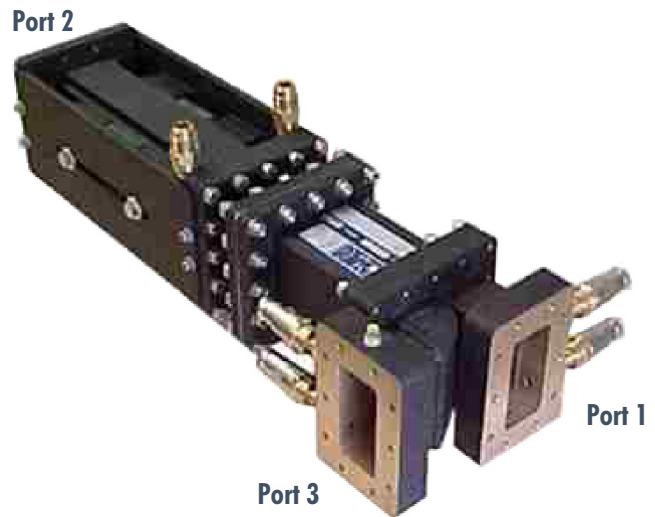

### Product Overview

---

This high power S band circulator is based on EM Design's unique patented concept. It is especially attractive for isolating reflection from resonant loads such as accelerators or other similar devices.

Note that the power input, Port 1, and the 90° elbowed Port 3 have two variable insertion E field probes (at each one) for monitoring and/or control signals. These probes can be varied from the nominal 60 db coupling. Typically, in isolator applications, a good high power load is attached to Port 3 to receive power reflected into Port 2.

This circulator is broadband, yet has very good narrow band specifications. Our customers are pleased with the improved system performance achieved by this design.

### Unit Specifications

---

<b>Peak Power</b>	8 MW	<b>Frequency Band</b>	2.85 (+/- 0.010) GHz
<b>Average Power</b>	10 KW (max)		
<b>Flanges</b>	CPR284F	<b>VSWR (Port 1)</b>	1.10 max
<b>Water Flow</b>	4 GPM		
<b>Water Temperature</b>	25° to 40° C (selectable)	<b>Isolation (Port 1 to Port 3)</b>	> 30 db
<b>Gas Pressure</b>	35 PSIG SF <sub>6</sub>	<b>Insertion (Port 1 to Port 2)</b>	< 0.2 db
<b>Length</b>	490 mm		

22661 Hwy 62  
Shady Cove, OR 97539  
541-878-3927  
Fax: 541-878-3937  
www.em-design.com  
hjohnson@em-design.com

UNIQUE SOLUTIONS. EXCEPTIONAL PERFORMANCE.

 EM DESIGN<sub>LLC</sub>