




EM Design Waterload

Model R284-3.0

Patent No. 4,516,088

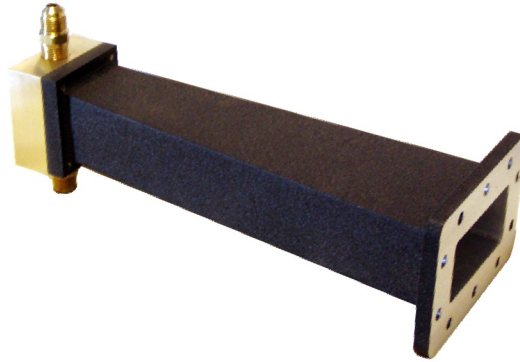

Product Overview

This high power load is very useful for converting a circulator into an isolator. The broad band performance of the load is especially useful for magnetron applications because it absorbs the spurious signals, as well as the desired fundamental, with equal efficiency.

It is an extremely broadband waterload that covers almost the entire bandwidth of the WR284 waveguide.

Unit Specifications

Peak Power	30 MW	Frequency Band	2.75 to 4.0 GHz
Average Power	9 KW (max)	VSWR	1.10 max
Flanges	CPR284F		
Water Flow	4 GPM		
Water Temperature	40° C (Nominal)		
Gas Pressure	34 PSIG SF ₆ @ Peak Power		
Length	307 mm		
Material	Guide Body - Aluminum Water Manifold - Brass, Polypropylene		
Water Connection	45° Flare, (Parker X48F-6-6)		

22661 Hwy 62
Shady Cove, OR 97539
541-878-3927
Fax: 541-878-3937
www.em-design.com
hjohnson@em-design.com

UNIQUE SOLUTIONS. EXCEPTIONAL PERFORMANCE.

 **EM DESIGN**.LLC